


ACO Industrial

Floor Drainage

RO125 range







and Specification

RO125H NW50 range


Full Flow Floor Trap with the following features:


- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odour-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Horizontal


• Outlet pipe outside diameter: 50.8mm NOTE: Floor finish to be specified

Typical applications:

Public toilets, Office block kitchenettes, Laundries













and Specification

RO125V NW50 range


Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odour-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Vertical

• Outlet pipe outside diameter: 50.8mm NOTE: Floor finish to be specified

Typical applications:

Public toilets, Office block kitchenettes, Laundries







SLOTS HOLES





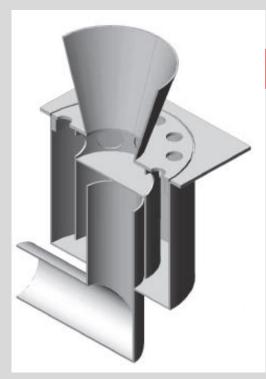



and Specification

RO125H NW50 range Funnel Type


Full Flow Floor Trap with the following features:


- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odour-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 50.8mm

NOTE: Floor finish to be specified


Typical applications:

Wherever there is a need to discharge directly into the drain above the floor level – Kitchenettes, Laundries






SQUARE FLANGE FOR TILES FLOORS









and Specification

RO125V NW50 range Funnel Type


Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odour-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 50.8mm

NOTE: Floor finish to be specified


Typical applications:

Wherever there is a need to discharge directly into the drain above the floor level – Kitchenettes, Laundries





SQUARE FLANGE FOR TILES FLOORS





Your local sales contact

ACO Systems SA 122 Shad Road Wadeviile Ext 2 Germiston Gauteng South Africa 0157

find us on: facebook.

Tel: +27 11 824 3525/6 Email: info@aco.co.za

www.aco.co.za www.buildingdrainage.aco www.hygienefirst.com

in

0 Instagram



- Drainage channels and gratings
- Road and point drainage
- Access covers
- Manhole covers
- Oil separators
- Grease separators
- Bridge drains
- Parking area drainage
- Sport facility drainage





