



ACO ShowerDrain

Borderless drainage solutions



ACO Shower Drainage



ACO ShowerDrain channel and grating

Domestic and residential shower drainage system

The ShowerDrain range is characterized by modern design and perfect functionality.

The design comprise of high quality stainless steel which is used for the production of the shower channel and grating.

The foul air trap is made out of polypropylene. From the user's point of view the ACO ShowerDrain excelled especially by the high flow rate, very low construction height and very easy maintenance.



Why choose the ACO ShowerDrain channel and grating?

Practical, flexible design options for every project

- Manufactured from S/S 304
- Variety of design options
- Safe, assembly-friendly installation
- Easy accessibility
- Two stage press part body

 no welded joints
- High drain performance with additional gullies for longer applications
- Gully body outlet positions fitted to individual application – can be rotated
- Rounded edges for improved hygienic performance



Products for every requirement



Hotel, wellness and spa facilities


Health and care facilities

Private and public residential buildings

ACO Shower Drainage



Channel information

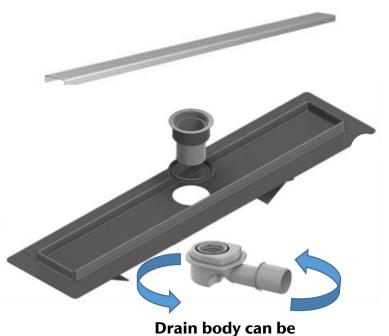

Gully body: Plastic Load class: K3

Internal channel width: 80 mm

Channel body: Stainless steel

Minimum building height: 77 mm with

inclination 1,5°

Flow rate: 0,4 l/s (with 10 mm build-up) 0,46 l/s (with 20 mm build-up as per

EN 1253-1)

Outlet socket: Suitable for all push-fit pipe

socket systems

Mounting: Modular assembly system consisting of channel body, screwed gully body and design grating body, screwed

gully body and design grating

Flange types: Surrounding, wall flange

Socket version: ND 40/ND 50

Foul air trap: One-piece with removable

submersible pipe

Flexible for any installation situation

Standard outlet range



Code: 9010.81.20

rotated 360°

Description: Horizontal outlet; Installation height 100-128mm;

Trap 50mm



Code: 9010.81.21

Description: Horizontal outlet; Installation height 80-128mm; Trap 30mm;



Code: 9010.81.23

Description: Vertical outlet; Installation height 15-128mm; Trap 50mm

Standard Grate Profiles



Slotted grate



Solid grate



Square grate



Round Hole grate



Tile insert



Arrow grate

Standard channel order data



ACO Shower M+ line drainage channel and outlet only (SA production)				
	Z9010.03.20	ShowerDrain M250 Channel without grate; Horizontal; Installation height 100-128mm; Trap 50mm (Includes Outlet code 9010.81.20)		
	Z9010.03.21	ShowerDrain M250 Channel without grate; Horizontal; Installation height 80-128mm; Trap 30mm (Includes Outlet code 9010.81.21)		
	Z9010.03.23	ShowerDrain M250 Channel without grate; Vertical; Installation height 15-128mm; Trap 50mm (Includes Outlet code 9010.81.23)		

Standard grating order data

r		
	Z9010.03.51	ShowerDrain M250 square grate; S/S 304 grate
	Z9010.03.52	ShowerDrain M250 slotted grate; S/S 304 grate
	Z9010.03.53	ShowerDrain M250 tile insert; S/S 304 grate
	Z9010.03.54	ShowerDrain M250 solid cover; S/S 304 grate
	Z9010.03.55	ShowerDrain M250 round hole grate; S/S 304 grate
11111	Z9010.03.56	ShowerDrain M250 Arrow grate; S/S 304 grate


Custom lengths and grating designs available on request


ACO Shower Drainage

ACO

Installation pictures



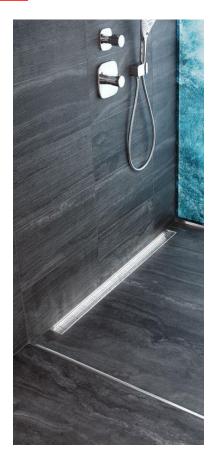

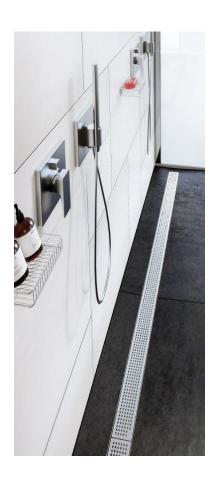

Your local sales contact

ACO DRAINAGE SYSTEMS LTD

96 Riverside Drive Allianz Plaza Building 2nd floor Nairobi Kenya

Tel: ++254 (0) 11 000 3001 Contact: Mr. Raj Singh Nagi

Sales Manager

Email: raj.nagi@aco.com

Mob: +254 (0) 793 961 969



www.aco.ke www.buildingdrainage.aco www.hygienefirst.com



www.aco.ke



www.buildingdrainage.aco



www.hygienefirst.com





